

SOFT TOUCH CUBE FUNCTION LINE

Touch aggregate with surface copying function for heavy machining of plastics, composites, and aluminum.



Machining capabilities: Milling and drilling

Typical applications:

- Rail vehicle transport:
Defined milling of aluminum profiles (train sidewall).
defined milling of weld seams
- Aviation: Keyed milling machining of aircraft turbines.

Technical Specifications

Max. input speed:	12,000 rpm
Max. output speed:	12,000 rpm
Gear ratio:	1 : 1
Max. torque:	10 Nm
Permissible operating temperature:	max. 85°C
Positioning of torque arm with respect to tool:	6 x 60°
Machining angle:	0°
Number of tool outputs:	1 / fixed
Lubrication:	Grease / Lifetime lubrication

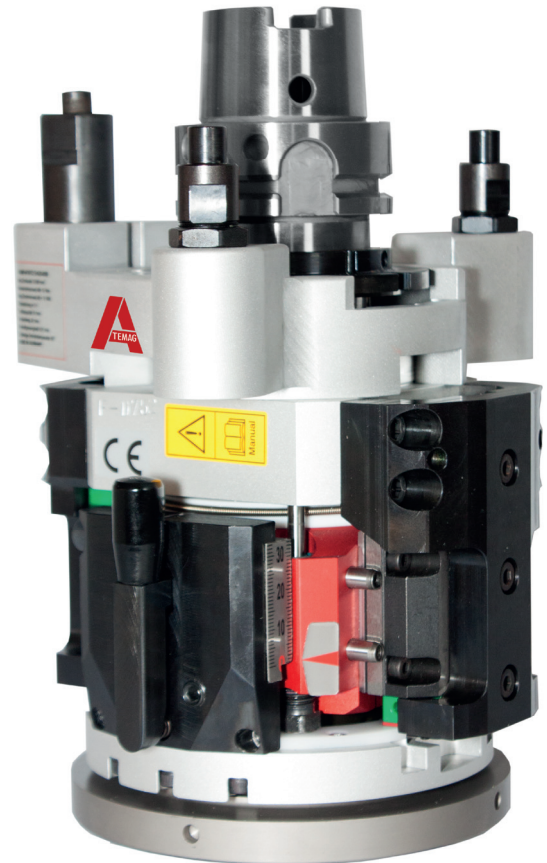

Tool connection

- Modular interface
- Other connections on request



Machine connection:

ATEMAG aggregates are used on all CNC machines and robot systems. The machine connection is precisely matched to the technical requirements of the CNC machine or robot.

